


Presenter with an Illuminated LED for SK1-211/311 series

- Two color LED incorporated (Green and Red)
- Paper retracting function available
- Compact and simple structure
- High reliability and long life with a stepping motor drive



Specifications	PR2-SK1-21	PR2-SK1-31
Adaptive model	SK1-211	SK1-311
Paper width	Max.60mm	Max.83mm
Paper thickness	0.059 to 0.10mm	
Paper core diameter.	Φ25.4(inside) x 31.4(outside)mm or more	
Paper length	50 to 250mm	
Ejection speed	Approx.300 mm/sec	
Paper stock direction	Upper	
Operating mode	Clamp mode/Retraction mode/Continuous mode	
Power supply voltage	24VDC±5%	
Operating environment	-20 to 60°C	
Dimensions	95.8(W) x 55.2(D) x 54.5(H) mm	

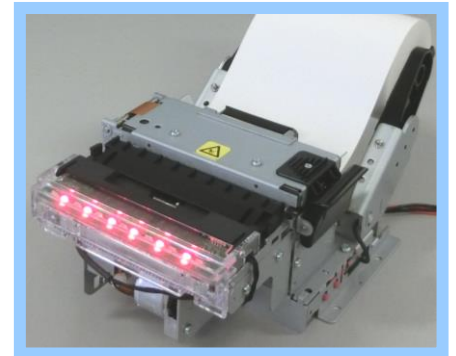