

**NEW**

**SK1-32**

3 inch KIOSK Printer

KIOSK Printer Unit

**Features**


- Easy operation with drop-in paper holder and head open function
- High speed printing up to 200mm/sec
- Compact and light weight
- Low height size (95mm height including roll paper)

**Applications**

- KIOSK systems
- ATM systems
- Gaming and Lottery
- Parking and Gas pos systems
- Various kinds for ticketing applications

**Options**

- Label gap sensor
- 2D Barcode
- Black mark sensor
- Bezel

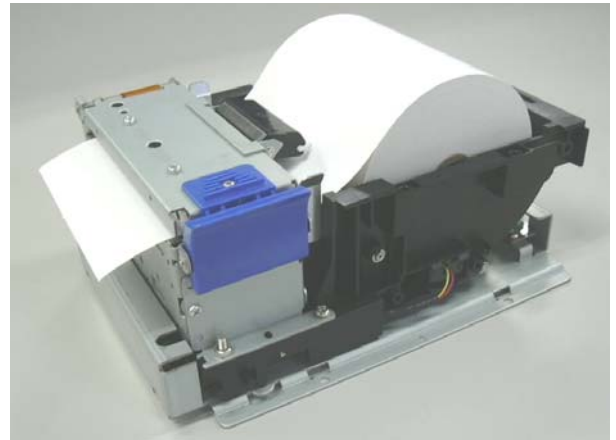

**Preliminary**

一般仕様	
Printing method	Direct line thermal
Resolution	8 dots/mm (203dpi)
Number of dots	Max. 640 dots/line
Printing width	Max. 80mm
Printing speed	Max. 200 mm/sec
Roll Paper	Paper width : 82.5/80/60/58mm Paper thickness : 0.059~0.15mm Paper roll diameter : Max. Φ83mm
Character font	8x16, 12x24, 24x24(KANJI), 16x16(KANJI)
Bar code	JAN13/8, CODE3, ITF, CODABAR, CODE128, UPC-A/E (Option) QR, Maxicode, PDF417
Auto Cutter	Full and partial cut (Command selectable)
Interface	RS232C Serial+USB
Sensor	Paper end, Paper near end, Head close, Print head temperature, Cutter jam, (Option) Black mark, Label gap sensor
Emulations	ESC/POS Conformity
Power	24VDC±5%
Operating temperature	-20 to 60 degrees C
Reliability	150km, 200million pulses/Print head 1,500,000 cuts/Cutter
Standards	CE, FCC, VCCI
Overall dimensions	128(W) × 174.5(D) × 74.2(H)mm 128(W) × 174.5(D) × 95(H)mm (Include Φ83mm roll paper)
Mass	Approx. 730g